

Professional Video Decoder

QVDEC - H.264 IP Video Decoder

IP input, 3G/HD/SD-SDI, CVBS, HDMI outputs



AdvancedDigital Inc.

QVDEC decoder is part of a reliable, high-performance solution for the high quality decoding and transport of SD and HD video/audio signals for broadcast applications.

Advanced H.264 High Profile compression, coupled with QVidium's patented ARQ Video Transport and Error correction, helps to maintain broadcast quality video distribution over nearly any IP network, including wireless networks and the Internet.



The QVDEC is part of the high quality professional line of advanced video codecs; a line of compact, powerful and cost-effective products designed for real-time encoding, and decoding for Content Gathering, Monitoring, and Distribution of broadcast quality video over IP networks.

QVDEC's advanced video transport couples broadcast and networking standards with patented error correction to take advantage of the inherent flexibility of IP and the Internet, providing broadcasters an efficient, affordable and scalable solution for professional quality video distribution quality over nearly any IP network.

The QVDEC provides H.264 High Profile video decompression, up to **1080p50/60**, along with support for up to 4 audio channels, multicasting, and multi-unicasting to allow cost-effective audio/video broadcast and IPTV solutions.



Applications

- Professional broadcast video distribution
- Live Event / Electronic News Gathering
- Confidence monitoring
- Video conferencing
- IPTV systems

Key Features

- **Real-time HD Video Decoding**
 - MPEG-4 AVC / H.264 High, Main and Baseline
 - ▶ Supports CBR & VBR bitrates up to 30 Mbps
 - ▶ Up to level 4.1
 - MPEG-2 Main Profile
 - Up to 4 audio channels (2 stereo pairs)
 - AC3 Pass-Through on S/PDIF
 - Video formats up to **1080p50/60**, PAL & NTSC
 - IP streaming input
 - SD and HD Decoding
 - Up and Down Scaling & Frame-rate conversion
- **Robust reception of Video & Audio**
 - Patented QVidium® ARQ error correction
 - Industry std. ProMPEG FEC (SMPTE-2022)
 - MPEG Transport Stream
- **Compact, cost-effective solutions**
 - Complete receiver ½ width - 1RU
- **User-friendly configuration and control**
 - WEB-based remote configuration & control
 - SNMP Trap support for NMS systems

QVDEC H.264/MPEG2 IP Video Decoder

Professional Video Decoder

QVDEC - H.264 IP Video Decoder

IP input, 3G/HD/SD-SDI, CVBS, HDMI outputs



AdvancedDigital Inc.

Specification

Video/Audio Interfaces

Video Outputs: 1x 3G-SDI / HD-SDI / SDI (SMPTE 425M(A&B), 424M, 292M, 259M), 1x CVBS, 1x HDMI
Audio Outputs: 2x Stereo Audio, 1x AC3 Pass-Through
Output Connectors: 2x Female BNC, 1x HDMI, 2x Mini-phonon, 1x S/PDIF

Video Decoding (HD & SD)

Video Decoding: MPEG4-AVC (H.264)
▶ High Profile, up to Level 4.1
▶ High, Main, and Baseline Profiles
MPEG-2 Main Profile
Bit rate: Constant bit rate or Variable bit rate
128 Kbps to 30 Mbps (w/o ARQ)
MPEG4-AVC (H.264), MPEG-2

Audio Decoding

Audio Decoding: MPEG-1 Layer2, MPEG-2 & MPEG-4 AAC-LC, AC3 (Pass-Through)
Sample rate: 32, 44.1, & 48 KHz
Bit rate: 16 Kbps (mono) to 384 Kbps (stereo)
Audio Channels: 4 mono-audio channels (2 stereo pairs)

IP Encapsulation


IP Encapsulation: MPEG-2 Transport Stream over RTP/UDP/IP, UDP/IP
IP Bitrate: 160 Kbps to 30 Mbps, 15Mbps w/ARQ
Error Correction: QVidium® ARQ (feedback-based)
US Patents: 7551647 & 7522528;
SMPTE 2022 FEC annex B

Video Resolutions

SD Video 625 lines, 25 frames/s (576i)
525 lines, 29,97 frames/s (480i)
HD Video 1080p60/59.94/50/30/25/24/23.98,
1080i60/59.94/50, and 720p60/59.94/50

Storage & Network Interfaces

Front & Rear Connection Diagrams

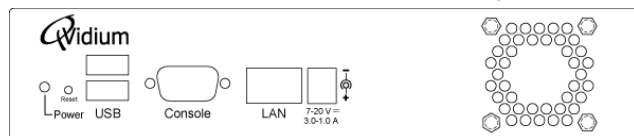

Networking port: 10/100/1000 Base-TX Gigabit Ethernet
Protocols: IEEE802.3 Ethernet
RTP, IPv4, TCP/UDP, IGMP v3
Connectors: 1x RJ45
External storage: Flash & Hard drives via 2 USB connectors

Control and Management

Type: 10/100/1000 Base-T Gigabit Ethernet
Features: Element control through HTTP/WEB.
SNMP traps for integration with Network Management System (NMS)
Protocol: HTTP, SNMP v2 traps
Connector: RJ45
USB Ports: 2
Maintenance Port: 1x RS232 9 pin D-SUB

Physical and Power


Input Voltages: 100-240VAC, 50-60Hz or 7-16 VDC
Input Currents: 150-75 mA for AC or 3.0-1.0 A for DC
Input Power: 18W
DC Connector: 2.5mm I.D. x 5.5mm O.D. x 9.5mm Female
Chassis: 209 x 182 x 44 mm (WxDxH)
Two units in 19" 1RU rack space
Installation: 19" 1 RU rack mounting kit

Environmental Conditions

Operating Temperature: 0°C - +55°C
Storage Temperature: -20°C - +70°C
Relative Humidity: 5% to 95%(non condensing)

Compliance

CE: 73/23/EEC (Low voltage equipment)
89/336/EEC (Electromagnetic compatibility)
Safety: IEC60950 and EN60950
EMC: EN55022, EN55024, EN6100-3-2

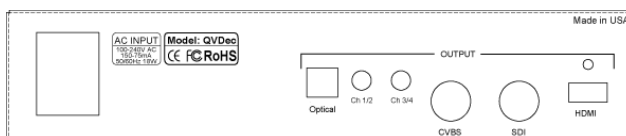

Ordering Information

QVDEC - HD/SD H.264 and MPEG-2 IP decoder, Composite, SDI and HDMI outputs

Available Options:

QVDEC-ARQ-Opt - ARQ error correction license

QVRM-KIT - 1RU rack mount kit

QVDEC H.264/MPEG2 IP Video Decoder

Contact info: sales@advanceddigital.ca

WEB: <http://www.advanceddigital.ca>

Tel: +1 416 479 0480

+1 416 848 0715